



ACCLAIM FLOW HYBRID MATTRESS

High-performance, non-powered hybrid system

FEATURES AT A GLANCE

- Air Flow Technology - one way inlet and outlet valves allow air to circulate across 10 latitudinal cells without the need for a pump or power
- Pressure automatically redistributes according to patient weight distribution
- Zoned, castellated foam overlay, with individual heel, head and body zones
- Firm edges for ease of patient ingress/egress, and transfers
- Vapour permeable and waterproof stretch cover, with welded seams and waterfall flap

TECHNOLOGIES


- Zoned castellated top foam section
- Heel, head and torso zones provide localised pressure reduction
- Firm edges for ease of patient ingress/egress and transfers
- Heavy-duty, anti-slip base
- Vapour permeable and waterproof multi-stretch cover
- Welded seams and waterfall flap zip
- Internal cells incorporated securely into foam
- Modular design allows for full part replacement
- Pressure redistribution is achieved through patient weight and movements without the need for a powered pump
- Advanced technology, suitable for the most vulnerable patients as each cell operates independently

COVER COMPOSITION

- 100% polycarbonate polyurethane (PU) coating
- Multi-stretch 100% nylon weave backing
- Flame retardant standard CAL117
- Antibacterial and antimicrobial
- Water resistance/hydrostatic pressure(mm):2000/mm/24hrs
- Moisture permeability(g/m2/24hrs): 500g/m2/24hrs

COVER CLEANING

- Cover removable, waterfall zip underneath for removal
- Machine washable cover
- Low to medium spin speed
- Hang or dry flat, or use drying cabinet
- Clean by 75% ethyl alcohol or neutral PH7 detergent

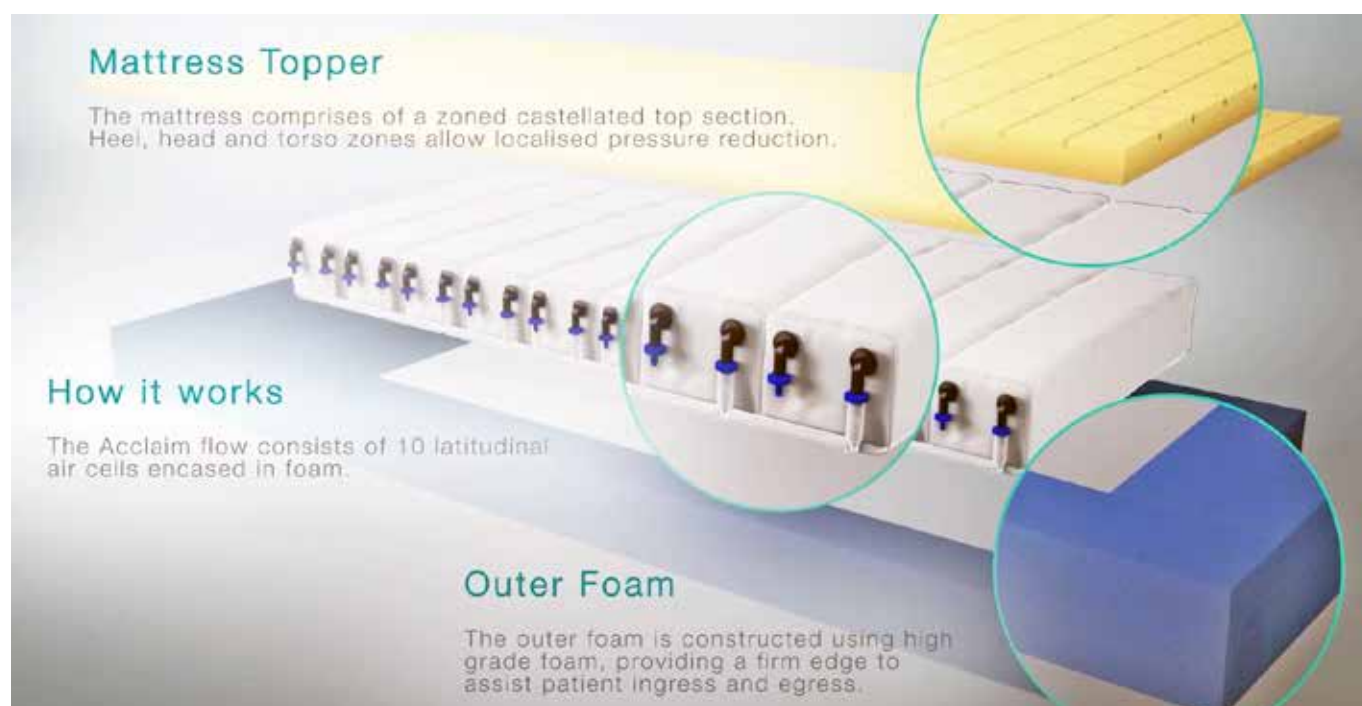

TECHNICAL SPECIFICATIONS

Dimensions

Single: L 1990 x W 880 x H 152 mm, 11kg

Safe Working Load

230kg

Pressure Care Rating

Medium to high risk

Order Codes

XDM-ACCL-FLOW

Recommended patient weight

30-180kg

Warranty

- 3 year warranty on foam and cells
- 2 year warranty on cover against defects